



DAW Power Technology Co., Ltd.

锂离子电芯规格书
Lithium ion battery cell specification sheet

电芯型号: 32800-7.5 Ah 磷酸铁锂电芯

Cell Type: 32800-7.5Ah LiFePO₄ Cell

文件编号: DAW-Ps-JS-016

版本版次: A1

初版日期: 5.12

生效日期: 2020.05.12

编制/日期	审核/日期	/日期
陈 枫	李 宏	李延东

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	3/13
文件名称	锂离子电芯规格书					

目录

Content

1. 基本信息 General Information

1.1 适用范围 Scope

1.2 产品分类 Product Classification

1.3 型号名称 Model Name

1.4 电芯特点 Benefit

1.5 主要应用 Main Application

1.6 电池组装 Battery Assembly

2. 标准规格 Nominal Specification

3. 测试条件 Test Conditions

3.1 标准测试条件 Standard Test Conditions

3.2 标准充电 Standard Charging Method

3.3 标准放电 Standard Discharging Method

4. 电性能 Electrochemical Performance

5. 环境特性 Environment Characteristic

6. 安全特性 Safety Characteristic

7. 存储与运输 Storage and Transportation

8. 安全守则 Precautions and Safety Instructions

9. 技术咨询 Consultation

附件 Anne

4

4

4

4

4

4

5

6

6

6

6

6

6

7

8

9

9

11

11

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	4/13
文件名称	锂离子电芯规格书					

1. 基本信息General Information

1.1 适用范围 Scope

本规格书规定了由合肥道沃能源科技有限公司生产的圆柱型锂离子电芯的技术要求，测试方法及注意事项，如需获取本规格书以外的技术要求，请与合肥道沃能源科技有限公司联系相关事宜。
This specification specifies the technical requirements, testing methods, and precautions for cylindrical lithium-ion batteries produced by DAW Power Technology Co., Ltd. If you need to obtain technical requirements outside of this specification, please contact DAW Power Technology Co., Ltd. for relevant matters.

1.2产品分类Product Classification

圆柱型可充电锂离子电芯
Cylindrical Rechargeable Lithium-ion Cell

1.3型号名称 Model Name

LiFePO₄ -32800-7.5Ah

1.4 电芯特点 Benefits

- 抗压镀镍钢外壳 Sturdy and pressure resistant steel envelope
- 高容量 High capacity
- 出色的循环寿命 Excellent cycle life
- 优秀的高低温性能 Excellent high and low temperature performance
- 电压输出稳定 Steady output voltage
- 自放电小 Low self-discharge
- 双重安全保护 Double safety protection
- 高抗振和抗冲击能力 With outstanding high level of vibrations and shocks

1.5 主要应用 Main Application

- 电动交通工具 EV/PHEV
- 通信后备电源 UPS
- 储能 Storage energy
- 启动电源 Starting power supply

1.6 电池组装 Battery Assembly

单个电芯根据具体应用组装成一定规格的电池组，由电池组与电子系统共同参与完成电池组的性能管理、热管理和安全管理。
Individual cells should be integrated in specific battery pack according to customers' demands. The battery pack together with electronic system provides performance, thermal and safety management.

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	5/13
文件名称	锂离子电芯规格书					

2. 标准规格Nominal Specification

项目Item		条件Condition/Note	规格Specification	备注
2.1标称容量 Norminal Capacity		1C放电容量 1C discharge capacity	7.5Ah	
2.2交流内阻 AC Impedance		在1000 Hz下测量 At AC 1000 Hz	6.5 mΩ	
2.3标称电压 Nominal Voltage			3.2V	
2.4电芯尺寸 Cell Size	电芯直径 Cell Diameter		32.2 ± 0.3 mm Max.32.5 mm	图形结构详细信息，请 参阅附图1。 For details,please prefer to Figure 1.
	电芯高度 Cell Height		80.5 ± 0.3 mm Max.80.8mm	
2.5电芯重量 Cell Weight		(光身电芯)	147 ± 0.005g	
2.6充电截止电压 End-of-charge Voltage		恒流充电 CC Mode	3.65V	
2.7充电截止电流 End-of-charge Current		恒压充电 CV Mode	0.3 A	
2.8充电方式 Charging Method	标准充电 Standard Charging		1Cat CC/CV	60 min
	快速充电 Max Continuous Charging		3C at CC/CV	20 min
2.9放电截止电压 End-of-discharge Voltage		恒流放电 CC Mode	2.0V	
2.10最大持续放电电流 Max continuous Discharging Current			22.5A	
2.11最大瞬时放电电流 Max Pulse Discharging Current			75A	3s
2.12循环性能 Cycle Life		1 C/100 %DOD	≥2000 cycles	
2.13操作温度 范围 Operating Temperature Range	充电温度 Charging Temperature		0~60℃	
	放电温度 Discharging Temperature		-20~60℃	
	储存温度 Storage Temperature	1年 1 year	-20~45℃	
2.14外观 Appearance		无破裂、划痕、变形、污渍、电解液泄露等 Without break,scratch,distortion,contamination,leakage and so on		

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	6/13
文件名称	锂离子电芯规格书					

3. 测试条件Test Conditions

3.1 标准测试条件 Standard Test Conditions

若无特别要求，此规格书上的室温为 $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$,产品测试条件为：温度 $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$,湿度15~90 %RH，大气压力86 kPa~106kPa。

If no otherwise requirement,room temperature(RT)is $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$,and all tests stated in this Specification are conducted at $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$,15~90%RH and atmospheric pressure of 86kPa~106 kPa.

3.2 标准充电Standard Charging Method

“标准充电”即在标准测试条件下，电芯先以恒定电流1 C 充电至3.65 V，再以3.65 V 的恒定电压充电至电流 小于0.05 C，搁置1h。

“Standard Charging”means that in standard test conditions,charge the cell at a constant current of 1 C until the voltage reaches 3.65V,then charge it at a constant voltage of 3.65 V until the current decreases less than 0.05 C and placed for 1 h.

3.3 标准放电 Standard Discharging Method

“标准放电”即在标准测试条件下，电芯以恒定电流1C 放电至2.0V。

“Standard Discharging”means that in standard test conditions,discharge the cell at a constant current of 1 C until the voltage reaches 2.0V.

4. 电性能 Electrochemical Performance

测试项目Test Item	测试方法Test Method	检验标准Criteria
4.1交流内阻 AC Impedance	电芯按3.2规定充电后在1000 Hz下测量。 Cell shall be measured at 1000 Hz after charged per 3.2.	$\leq 8\text{m}\Omega$
4.2初始容量 C_{ini} Initial Capacity	电芯按3.2规定充电后，按3.3规定完全放电。 Cell shall be charged per 3.2 and discharged per 3.3 within 1h after full charge.	初始容量 $\geq 7.5\text{Ah}$ $C_{\text{initial}} \geq 7.5\text{ Ah}$
4.3循环寿命 Cycle Life	电芯按1 C CC/CV充电后搁置30 min,然后以1 C 恒流放电至2.0V结束，搁置30 min,再进行下一次循环，连续2000次。 Cell shall be charged at CC/CV mode(CC:1 C,CV:3.65 V,End-of-charge current:0.05 C); After stored for 30 min,cell shall be discharged at CC mode(1 C,End-of-charge voltage:2.0 V); After stored for 30 min,tests shall be continued for 2000 times.	容量保持率 $\geq 80\%$ Capacity retention $\geq 80\%$

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	7/13
文件名称	锂离子电芯规格书					

4.4倍率放电性能 High-rated Discharging Performance	电芯按3.2规定充电后，室温下以3 C电流放电至终止电压。 Cell shall be charged per 3.2,and discharged at 3C to ending voltage at RT.	放电容量: Discharge Capacity: ≥90%Cini
4.5低温性能 Low Temperature Performance	电芯按3.2规定充电后，将电芯放入一定温度的低温箱中恒温4h,然后以1 C电流放电至终止电压。 Cell shall be charged per 3.2 and stored in a temperature- controlled environment for 4h.Then discharged cell at 1C to ending voltage.	放电容量: Discharge Capacity: ≥70%Cini(-20℃)
4.6常温存储 Room Temperature Storage Test	电芯按3.2规定充电后，在25℃ ± 2℃下搁置28天，再以1C恒流放电至终止电压。 Cell shall be charged per 3.2,then stored at 25℃ ± 2℃ for 28 days.Finally discharged cell at 1 C to ending voltage	容量保持率≥90% Capacity retention ≥90%
4.7高温存储 High Temperature Storage Test	电芯按3.2规定充电后，在55℃ ± 2℃下搁置7天后，室温搁置5h,再以3.3规定放电。 Cell shall be charged per 3.2,then stored at 55℃ ± 2℃ for 7 days.After standing for 5h,discharged cell per 3.3.	容量保持率≥90% Capacity retention ≥90%

5. 环境特性 Environment Characteristic

测试项目Test Item	测试方法Test Method	检验标准Criteria
5.1恒温恒湿性能 Constant Temperature and Humidity Test	电芯按3.2规定充电后，将电芯放入45℃ ± 2℃ (90~95%RH)的恒温恒湿箱中搁置48h后取出，在室温下搁置2h,观察1h。 Cell shall be charged per 3.2,and stored in 45℃ ± 2℃ (90~95%RH)for 48 h.Then be placed in RT for 2h and checked for 1h.	电芯无变形、无锈蚀、不冒烟、不爆炸 No distortion,no rust,no fume and no explosion.
5.2温度冲击性能 Thermal Shock Test	电芯按3.2规定充电后，放入温度箱中，60 min内降至-40℃,保持90 min后，在60 min内升至25℃,再在90 min内升至85℃,保持110 min,然后在70 min内降至25℃。重复上述步骤5次，观察1h。 Cell shall be charged per 3.2,and put into an oven. Temperature inside the oven will drop to -40 °℃ in 60 min and remain for 90 min.Then it will rise to 25℃ in 60 min and keep rising to 85℃ in 90 min,following by remaining for 110 min.And it will drop to 25 °℃ in 70 min. Repeat this process for 5 times,then check it for 1h	电芯不爆炸、不起火、不漏液 No explosion,no fire,no leakage.
5.3低气压测试 Low-pressure Test	电芯按3.2规定充电后，放入低气压箱中，调节气压为11.6kPa,温度为室温，静置6h后，观察1h。 Cell shall be charged per 3.2,then stored it for 6h at an absolute pressure of 11.6 kPa (RT).Check it for 1h.	电芯不爆炸、不起火、不漏液 No explosion,no fire,no leakage.
5.4跌落测试	电芯按3.2规定充电后，正负端子向下从1.5 m高度自由跌落到水泥地面上，观察1h。	电芯不爆炸、不起火

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	8/13
文件名称	锂离子电芯规格书					

Drop Test	Cell shall be charged per 3.2, then dropped from a height of 1.5 m onto the concrete ground. Positive and negative terminals of cells shall be towards the ground. Check it for 1 h.	No explosion, no fire.
5.5浸泡测试 Soaking Test	电芯按3.2规定充电后，完全浸入3.5 wt% NaCl 溶液中2h, 观察1h。 Cell shall be charged per 3.2, then completely soaking into NaCl solution (3.5 wt %) for 2h. Check it for 1h.	电芯不爆炸、不起火 No explosion, no fire.

6. 安全特性 Safety Characteristic

测试项目 Test Item	测试方法 Test Method	检验标准 Criteria
6.1短路 External Short-Circuiting Test	电芯按3.2规定充电后，将正、负极经外部短路10 min, 外部线路电阻应小于5mΩ; 静置1h。 Cell shall be charged per 3.2, then short-circuited by connecting the positive and negative terminals with a resistance of <5mΩ for 10 min. Check it for 1h.	电芯不爆炸、不起火 No explosion, no fire.
6.2过充电 Over-charge Test	电芯按3.2规定充电后，以1C电流充电至5.5 V或充电达1h后停止充电，观察1h。 Cell shall be charged per 3.2, then charged at 1C to ending voltage of 5.5V or charged at 1C for 1h. Check it for 1h.	电芯不爆炸、不起火 No explosion, no fire.
6.3过放电 Over-discharge Test	电芯按3.2规定充电后，以1C电流放电90min, 观察1h。 Cell shall be charged per 3.2, then discharged at 1C for 90 min. Check it for 1h.	电芯不爆炸、不起火、不漏液 No explosion, no fire, no leakage.
6.4挤压测试 Crush Test	电芯按3.2规定充电后，以半径为75 mm半圆柱体垂直电芯极板方向，以(5 ± 1)mm/s速度挤压，当电压为0 V或变形量达到30%或挤压力达到200kN后停止挤压，观察1h。 Cell shall be charged per 3.2, then crush the cell perpendicularly to the cell plate at a rate of (5 ± 1)mm/s with a semi-cylinder (radius of 75 mm). When met any of the following criteria, stopping crushing and check it for 1h. 1. Voltage reaches 0V; 2. Deformation reaches 30%; 3. Pressure reaches 200 kN.	电芯不爆炸、不起火 No explosion, no fire.
6.5针刺测试	电芯按3.2规定充电后，用φ5 mm~φ8 mm的耐高温钢针，以(25 ± 5)mm/s的速度，从垂直于蓄电池极板的方向贯穿，贯穿位置宜靠近所刺面的几何中心，钢针停留在蓄电池中，观察1h。 Cell shall be charged per 3.2, then acupuncture the cell perpendicularly to the cell plate at a rate of (25 ± 5)mm/s with a φ5 mm~φ8 mm steel needle and remain it inside	电芯不爆炸、不起火

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	9/13
文件名称	锂离子电芯规格书					

Acupuncture Test	The steel needle stays in the battery and is observed for 1 hour.	No explosion,no fire.
6.6热冲击测试(130℃) Heating Test	电芯按3.2规定充电后，放置入温度箱，以5 ° C/min的速率由室温升至130℃ ± 2℃,并保持30 min后停止加热，观察1h。 Cell shall be charged per 3.2,then heated in an oven Temperature will rise to 130℃ ± 2℃ at a rate of 5 ° C/min and remain for 30 min.Check it for 1h.	电芯不起火，不爆炸。 No explosion,no fire.

7. 存储与运输 Storage and Transportation

7.1 由于电芯的特性，需要对电芯进行合适的包装来保护。

Based on the character of cell,proper environment for transportation of pack need to be created to protect the battery.

7.2运输过程中需保证电芯带电量为50%SOC，以确保不受短路和液体的损伤。

During transportation,50%SOC must be kept to ensure that short circuit,appearance of liquid in the battery or immersion of battery in liquid never occur.

7.3 电芯需在-20 ° C-45℃的干燥、清洁、通风的环境下存储。

Cell should be kept at-20℃-45℃ in warehouse where it's dry,clean and well-ventilated.

7.4装卸电池时需注意避免跌落、翻转和堆积。

During loading of battery,attention must be paid against dropping,turning over and serious stacking.

8. 安全守则 Precautions and Safety Instructions

为避免电芯泄露，过热和爆炸，请注意以下事项：

In order to prevent the battery leakage,getting hot and explosion,please pay attention to preventing measures as following:

Warning!

- 请勿将电池投入水中。非使用时，电池需在干燥阴凉处存放。

Never throw the battery into water.Store it under dry,shady circumstance when not use.

- 请勿颠倒正负极使用。

Never misidentify the positive and negative terminals

- 请勿直接用金属接通正负极，避免短路。

Never connect the positive and negative terminals of battery with metal to prevent short-circuiting.

- 请勿将电池与金属一起储存或运输。

Never ship or store the battery together with metal.

- 请勿敲击、投掷或踩踏电池。

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	10/13
文件名称	锂离子电芯规格书					

Never knock,throw or trample the battery.

- 请勿用钉子或其它利器破坏电池。

Never cut through the battery with nail or other edge tool.

Tips!

- 请勿在过高的温度下使用或储存电池，否则会引起电池过热，致使寿命减短和性能降低，甚至起火。长时间储存的温度范围建议是10~45℃。

Never use or store the battery under the over-high temperature.Otherwise it will lead to battery over-heating, which might lose some function and reduce life,even getting fire.The proposed temperature for long-term storage is 10~45℃.

- 请勿将电池投入火中或其它热源中，避免起火、爆炸和环境污染。废电池需回收至供应商处，移交回收站处理。

Never throw the battery into fire or heating machine to avoid fire,explosion and environment pollution;scrap battery should be returned to the supplier and handled by the recycle station.

- 请勿将电池置于强静电场或强磁场中，否则会破坏保护设备。

Never use the battery under strong static electronic and magnetic field,otherwise it will destroy the protecting device.

- 若电解液泄露并进入眼睛，请勿揉捏，经水洗后尽快就医。

Never knead eyes ifleakage electrolyte gets into eyes.Wash eyes by water and seek medical advice ASAP.

- 若电池在使用、储存、充电过程中发出异味，过热，形变或其他非常规情况，请停止使用并移除设备。

If battery emit peculiar smell,over-heating,distortion or appear any unconventionality during using,storage or charging process,please stop using and take it out ofthe device.

- 请勿在充电中直接插拔电池，并使用规定充电设备进行充电。

Never cut the battery in socket directly,please use the stated charger when charging.

- 使用前请检查电池电压和相关连接器；若有异常请勿使用。

Check the voltage of battery and relevant connectors before using.Do not use until everything turns out to be normal.

- 在充电前请检查相关设备绝缘性、物理状态和老化情况。电池电压需高于截止电压，如有异常，需标记并勿更改现状，然后通知我们售后服务部门，待我们工作人员到场维修。

Prior to charging,fully check the insulativity ,physical condition and ageing status.The pack voltage must not be less than the cut-off voltage;if not,it needs to be labeled.The user should contact our Customer Service Department.It can't be charged until repaired by our staff

- 电池需在50%SOC 下储存，若半年未使用，需重新充电。

The battery should be stored in 50%SOC.It needs to be charged once again if out ofuse for as long as half a year.

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	11/13
文件名称	锂离子电芯规格书					

- 若电极端子污染，需用干净、干燥的棉布擦拭，否则会导致接触和操作不良。

Clean the dirty electrode with a clean dry cloth if any contamination appears,otherwise poor contact or operation failure may occur.

9. 技术咨询 Consultation

如有疑问，请按以下方式咨询：

As to obscurity,contact us as followings:

合肥道沃能源科技有限公司

DAW Power Technology Co., Ltd.

地址：安徽省六安市舒城县杭埠镇南聚产业园

Address:Nanju Industrial Park,Hangbu Town,Shucheng County,Luan City,Anhui

Province Postcode:231323

WhatsApp: 8613855177354

WeChat: +86 15665457677


Email: Brett@dawpower.com

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	12/13
文件名称	锂离子电芯规格书					

附件 Annex


附图1/Figure1

电池图片和外形尺寸
Cell's appearance and dimension

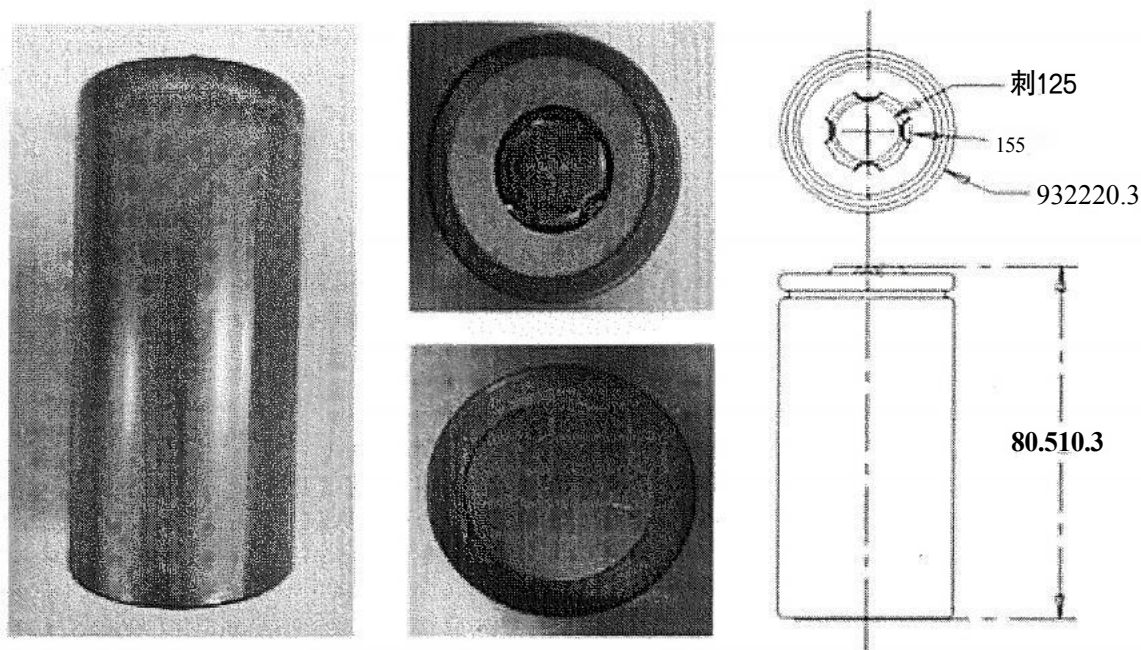

附图2/Figure2


7.5Ah 磷酸铁锂系电池不同倍率充电曲线
Different rate charge curve of 7.5Ah LiFePO₄ Cell

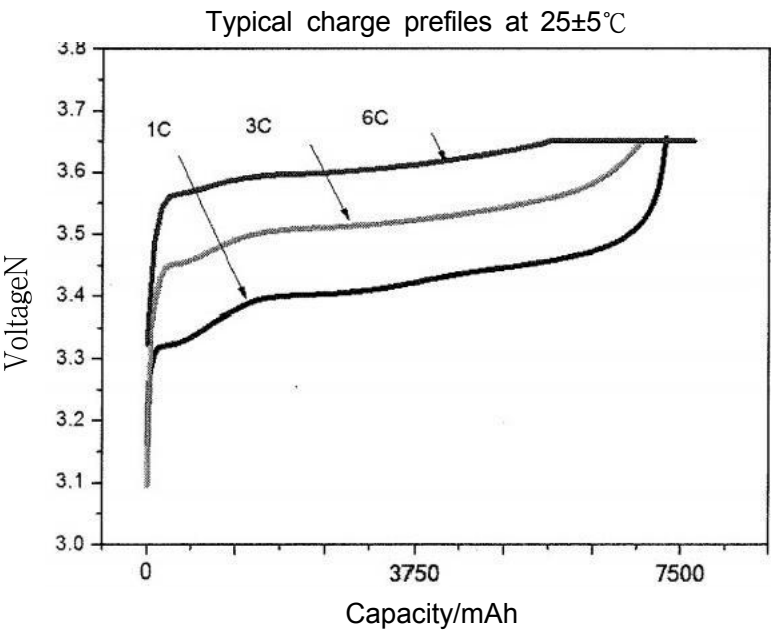

	文件编号	DAW-Ps-JS-016	版本号	A1	页码	13/13
文件名称	锂离子电芯规格书					

附图3/Figure3

7.5Ah磷酸铁锂系电池不同倍率放电曲线
Different rate discharge curve of 7.5Ah LiFePO₄ cell
Typical discharge profiles at 25±5℃

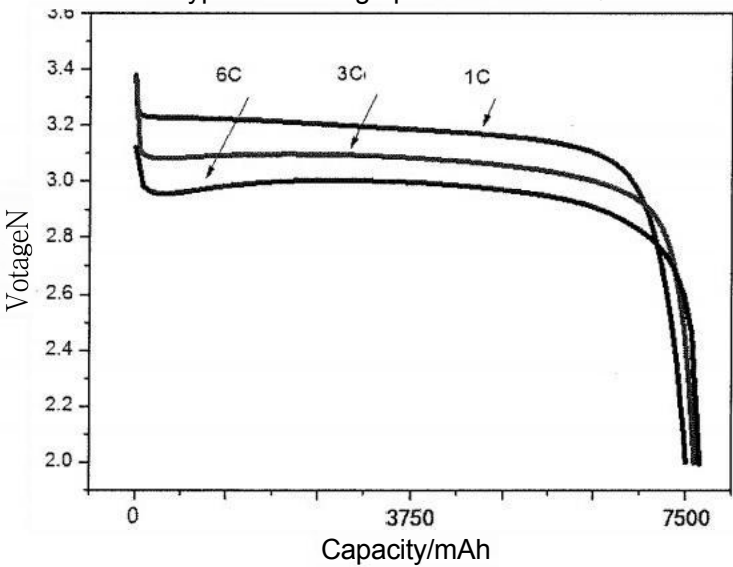

附图5/Figure5

7.5Ah磷酸铁锂电池1C 循环曲线图
Circular curve of 7.5 Ah
LiFePO₄ cell

